




DIANA Series

L2 Gigabit Access Switch

Product Overview

AADONA DIANA series are full GbE standalone switches provide enterprise-class access for campus and branch applications. These fully managed switches can provide advanced Layer 2 features as well as optional Power over Ethernet Plus (PoE+) power. it integrates advanced management and security functions to provide performance and scalability. It is ideal solution for enterprise and carrier access network deployment

Appearance	Description
 <p>DMS-8G-2FL</p>	<ul style="list-style-type: none"> □ 8x10/100/1000Base-T+2x100/1000Base-X (SFP) □ 1 console, 1 reset port □ AC power supply □ Switching capacity: 20Gbps □ Forwarding rate: 14.9Mpps
 <p>DMS-8G-2FPL</p>	<ul style="list-style-type: none"> □ 8x10/100/1000Base-T+2x100/1000Base-X (SFP) □ 1 console, 1 reset port □ PoE+, up to 124w □ AC power supply □ Switching capacity: 20Gbps □ Forwarding rate: 14.9Mpps
 <p>DMS-48G-4FL</p>	<ul style="list-style-type: none"> □ 48x10/100/1000Base-T+4x100/1000Base-X (SFP) □ 1 console, 1 reset port □ AC power supply □ Switching capacity: 104Gbps □ Forwarding rate: 77.4Mpps

Key Features and Highlights

Green Energy

DIANA series complies with **IEEE 802.3az** (Energy-Efficient Ethernet) standard, dramatically lower power consumption

With the **Innovative port-LED Shut-off** function, the user can automatically set the switch port-LED UP or DOWN at a specified period according to their needs to achieve functional, energy-saving correct results.

A full account of low noise requirements of the environment, DIANA uses **Fanless Design and Smart fan** strategies to real-time temperature monitoring system, and reduce the noise pollution.

Enhanced Security

DIANA series provides a variety of security mechanisms like SYN Flood, Land, ICMP Flood attack prevention and other DOS class technology, BPDU Guard and Root Guard which avoid accidental topology loops and prevent illegal edge devices become root to cause unnecessary flapping.

IEEE 802.1X port-based access control ensures all users are authorized before being granted access to the network. User authentication is carried out using any standard-based RADIUS server.

Access Control Lists (**ACLs**) can be used to restrict access to sensitive network resources by denying packets and forward by different policies. User-defined ACL provides more flexible access control for users.

DIANA series support **DHCP snooping**, which prevents DHCP attacks and illegal DHCP SERVER by setting trust ports and untrusted ports. With DHCP Snooping binding and option82 enabled, it can combine

modules like dot1x and ARP, or implement user-access-control independently.

DIANA series supports many more L2 security features such as **ARP guard, Anti-ARP scanning**, and other ARP and **MAC Security** technology to protect network security and reliability. MAC address filtering and Lock-down. Secured encryption method of data transmission.

High Reliability

DIANA series support 4 Gigabit uplink ports, which could be designed to offer redundant uplinks with various ring protection applications, effectively raised the expansibility and performance of the network.

G.8032 provides <50ms ring protection and recovery switching for Ethernet traffic in a carrier ring topology.

DIANA series support G.8032 v2 and can be deployed in a variety of complex network topologies including single ring, tangent ring, intersecting rings, double rings, and other home networking.

Abundant Multicast Features

DIANA series also support **MVR** (Multicast VLAN Register), selectively allows traffic to cross between different VLANs for bandwidth and security reasons. With the MVR Trunk function, which could associate multicast VLAN to trunk port, the DIANA series combines the VLAN data into the same link, saving lots of resources for users.

DIANA series could prevent multicast traffic from flooding via IGMP Snooping, while multicast traffic is only forwarded to ports associated with multicast devices.

Product Specifications

Item	DMS-48G-4FL	DMS-8G-2FPL	DMS-8G-2FL
Ports	48 x 10/100/1000Base-T + 4 x 100/1000Base-X (SFP) Auto-MIDX	8 x 10/100/1000Base-T + 2 x 100/1000Base-X (SFP) Auto-MIDX	8 x 10/100/1000Base-T + 2 x 100/1000Base-X (SFP) Auto-MIDX
Performance			
Switching Capacity	104Gbps	20Gbps	20Gbps
Forwarding Rate	77.4Mpps	14.9Mpps	14.9Mpps
MAC ADDRESS	16K	8K	8K
Jumbo Frame	12K	10K	10K
ACL Table	2048	1408	1408
Queues per port	8	8	8
VLAN TABLE	4K	4K	4K


Item		DMS-48G-4FL	DMS-8G-2FPL	DMS-8G-2FL
Physical				
Dimension(W×H×D)		442mm x 220mm x 43.6mm	340mm x 43.6mm x 200mm	220mm x 160mm x 44.3mm
Power Input		100~240VAC, 50~60Hz	100~240VAC, 50~60Hz	100~240VAC, 50~60Hz
Power Consumption		40W	144W	7W
Cooling		Active	Passive	Passive
Temperature		Working 0°C~50°C, Storage -40°C~70°C		
Relative Humidity		5%~95%, non-condensing		
EMC Safety		CE, RoHS		
POE		NA	IEEE 802.3af POE (15.4W) IEEE 802.3at POE+ (30W) PoE output 124w	NA
Main Features				
Forwarding		Storage and Forwarding		
VLAN		Port-based VLAN, IEEE802.1Q, private VLAN, Protocol VLAN, Voice VLAN, MAC VLAN, IEEE 802.3ac Vlan tagging, IEEE 802.1v Normal QinQ, Selective QinQ, Flexible QinQ VLAN Translation, N:1 VLAN Translation		
DHCP		IPv4/IPv6 DHCP Client, IPv4/IPv6 DHCP Relay Option 82, Option 37/38 IPv4/IPv6 DHCP Snooping, IPv4/IPv6 DHCP Server		
Reliability	Spanning Tree	802.1D STP, 802.1W RSTP, 802.1S MSTP Root Guard, BPDU Guard, BPDU Forwarding		
	LACP	16 groups / 8 ports	8 groups / 8 ports	
	L2 Ring Protection	MRPP ITU-T G.8032 Loopback Detection and loop protection Fast Link IEEE 1588v2		
Security		IP ACL, MAC ACL, MAC-IP ACL, User-Defined ACL Time Range ACL ACL rules can be configured to port, VLAN Storm Control based on packets and bytes Port Security, MAC Limit based on VLAN and Port Anti-ARP-Spoofing, Anti-ARP-Scan, ARP Binding ND Snooping DAI IEEE 802.1x Authentication, Authorization, Accounting Radius, TACACS+		
Multicast		IGMP v1/v2/v3 snooping, IGMP Fast leave MVR MLD v1/v2 snooping IPv4/IPv6 DCSCM		
QoS		8 Queues Per Port Bandwidth Control Flow Redirect Classification based on ACL, VLAN ID, COS, TOS, DSCP, Control plane prioritization (CPP) or equivalent Single Rate single barrel double color for Policing Remark DSCP, COS/802.1p, Precedence, TOS SP, WRR, SWRR, WDRR for Scheduling Match the IP fragmentation of a message		
L3 Features		Static routing		

Item	DMS-48G-4FL	DMS-8G-2FPL	DMS-8G-2FL
Maintenance and Operation Management	TFTP/FTP, CLI, Telnet, Console, Reset Web/SSL (IPv4/IPv6) SSH (IPv4/IPv6) SNMPv1/v2c/v3 SNMP Trap Public & Private MIB interface RMON 1,2,3,9 Ping, Trace Route Radius Authentication Syslog (IPv4/IPv6) Sntp/NTP (IPv4/IPv6) Dual IMG, Multiple Configuration Files Port Mirror, CPU Mirror, RSPAN sFlow OAM EFM VCT, DDM ULDP (like Cisco UDLD) or equivalent LLDP/LLDP MED		
Green Energy	IEEE 802.3az (Energy Efficient Ethernet) Fanless (DMS-8G-2FL) LED Shut-off		

Typical Application

DIANA Series switch is deployed as Gigabit access in a Campus / ISP network

DIANA Series POE switch supports Access points, cameras and other PE devices

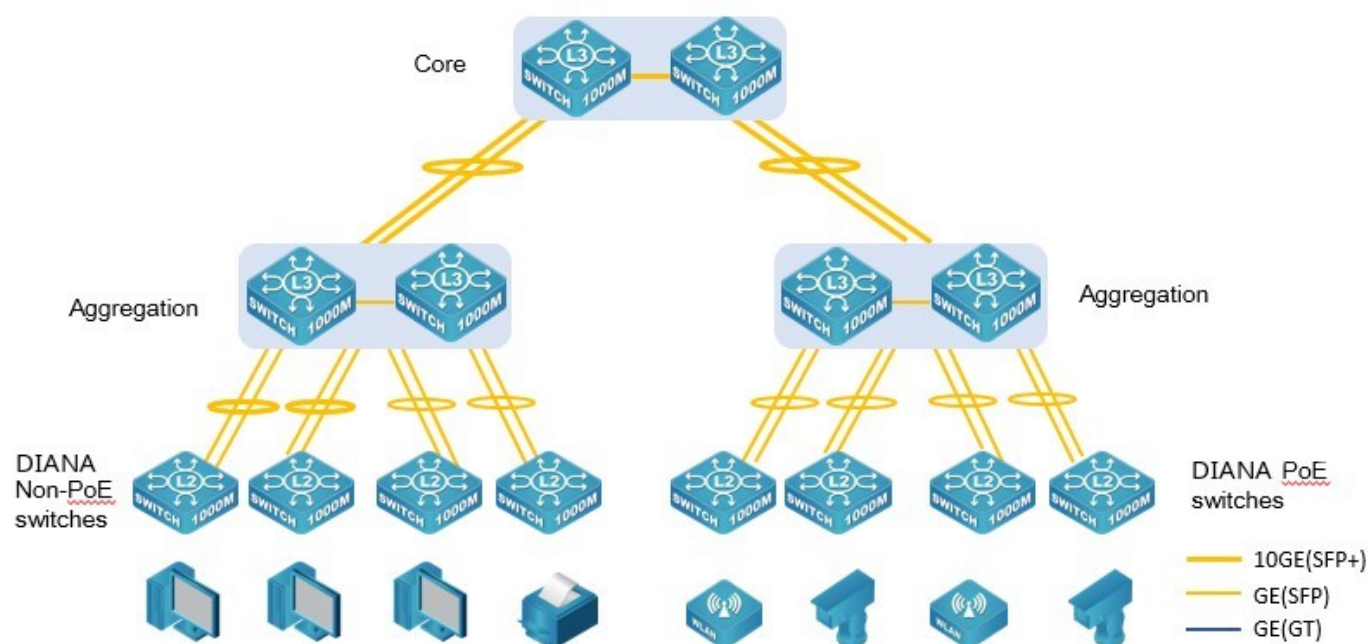



AADONA Communication Pvt Ltd

1st Floor, Phoenix Tech Tower

Plot No. 14/46, IDA - Uppal

Hyderabad, Telangana 500039

Phone : 1800-202-6599

www.aadona.com

contact@aadona.com

AADONA Communication Pvt Ltd

7, SBI Colony, Mohaba Bazar

Hirapur Road, Raipur

Chhattisgarh 492099

Phone : 1800-202-6599

www.aadona.com

contact@aadona.com